

FLIR A315 / A615

Thermal Imaging Cameras for Machine Vision



The FLIR A315 / A615 is a series of compact and affordable thermal imaging cameras, fully controlled by a PC. Due to their compliance to standards, FLIR A315 / A615 are Plug&Play with third-party Machine Vision software like National Instruments, Cognex, Matrox, MVtec and Stemmer Imaging.

EXCELLENT IMAGE QUALITY

The FLIR A615 is equipped with an uncooled Vanadium Oxide (VoX) detector that produces crisp thermal images of 640 x 480 pixels. This allows more accuracy and shows more details at a longer distance. The FLIR A615 also has a high-speed infrared windowing option.

Users that do not need the high image quality of the FLIR A615 can choose the A315 that produces thermal images of 320 x 240 pixels. Both cameras make temperature differences as small as 50 mk clearly visible. They come with a built-in 25° lens with motorized focus and autofocus. Optional lenses are available.

GigE VISION™ STANDARD COMPATIBILITY

An industry first, GigE Vision is a camera interface standard developed using the Gigabit Ethernet communication interface. GigE Vision is the first standard to enable fast image transfer using low-cost standard cables even over long distances. With GigE Vision, hardware and software from different vendors can interoperate seamlessly over GigE connections.

GenICam™ PROTOCOL SUPPORT


Another industry first. The goal of GenICam is to provide a generic programming interface for all kinds of cameras. The GenICam protocol also makes third-party software compatible with the camera.

16-BIT TEMPERATURE LINEAR OUTPUT


Allows you to do temperature measurements in a non-contact mode with any third-party software. A built-in Gigabit Ethernet connection allows real-time 16-bit image streaming to a computer.

ENVIRONMENTAL HOUSING (FLIR A315)

The FLIR A315 can be ordered with an environmental housing. The housing increases the environmental specifications of the FLIR A315 to IP66, protecting the camera's from dust and water without affecting any of the camera features. The housing is available for cameras that are equipped with a 25°, 45° or 90° lens, and can be ordered separately as an accessory.

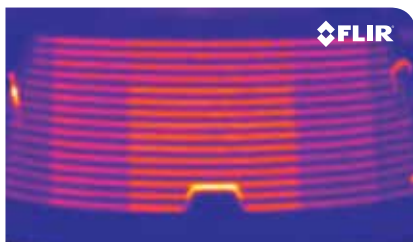

Inspection of a windshield defroster for damaged electrical elements.

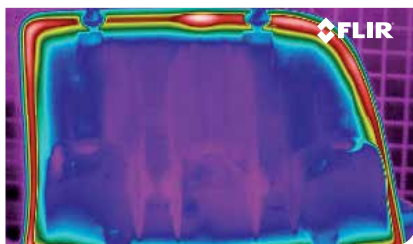

Black glue on black plastic.

Technical specifications FLIR A315/ A615

| Imaging & Optical Data | FLIR A315 | FLIR A615 |
|--|--|---|
| Field of view (FOV) / Minimum focus distance | 25° × 18.8° / 0.4 m (1.31 ft.) | 15°: 15° × 11° (19° diagonal) / 0.50 m (1.64 ft.) 25°: 25° × 19° (31° diagonal) / 0.25 m (0.82 ft.) 45°: 45° × 34° (55° diagonal) / 0.15 m (0.49 ft.) 7°: 7° × 5.3° (8.7° diagonally) / 2.0 m (6.6 ft.) 80°: 80° × 64.4° (92.8° diagonal) / 65 mm (2.6 in.) |
| Spatial resolution (IFOV) | 1.36 mrad | 15°: 0.41 mrad 25°: 0.68 mrad 45°: 1.23 mrad 7°: 0.19 mrad 80°: 2.62 mrad |
| Focal length | 18 mm (0.7 in.) | 15°: 41.3 mm (1.63 in.) 25°: 24.6 mm (0.97 in.) 45°: 13.1 mm (0.52 in.) 7°: 88.9 mm (3.5 in.) 80°: 6.5 mm (0.26 in.) |
| F-number | 1.3 | 1.0 |
| Image frequency | 60 Hz | 50 Hz (100/200 Hz with windowing) |
| Detector data | | |
| Focal Plane Array (FPA) / Spectral range | Uncooled microbolometer / 7.5–13 µm | Uncooled microbolometer / 7.5–14 µm |
| IR resolution | 320 × 240 pixels | 640 × 480 pixels |
| Detector pitch | 25 µm | 17 µm |
| Detector time constant | Typical 12 ms | Typical 8 ms |
| Measurement | | |
| Object temperature range | -20 to +120°C (-4 to 248°F) 0 to +350°C (32 to 662°F) | -20 to +150°C +100 to +650°C +300 to +2000°C |
| USB | | |
| USB | N/A | Control and image |
| USB, standard | N/A | USB 2 HS |
| USB, connector type | N/A | USB Mini-B |
| USB, communication | N/A | TCP/IP socket-based FLIR proprietary |
| USB, image streaming | N/A | 16-bit 640 × 480 pixels at 25 Hz - Signal linear - Temperature linear - Radiometric |
| USB, protocols | N/A | TCP, UDP, SNMP, RTSP, RTP, HTTP, ICMP, IGMP, ftp, SMTP, SMB (CIFS), DHCP, MDNS (Bonjour), uPnP |
| Ethernet | | |
| Ethernet, image streaming | 16-bit 320 × 240 pixels at 60 Hz - Signal linear - Temperature linear - Radiometric GigE Vision and GenICam compatible | 16-bit 640 × 480 pixels at 50 Hz 16-bit 640 × 240 pixels at 100 Hz 16-bit 640 × 120 pixels at 200 Hz - Signal linear - Temperature linear - Radiometric GigE Vision and GenICam compatible |

| Imaging & Optical Data | |
|--------------------------|--------------------------------------|
| Lens identification | Automatic |
| Thermal sensitivity/NETD | < 0.05°C @ +30°C (86°F) / 50 mK |
| Focus | Automatic or manual (built in motor) |
| Measurement | |
| Accuracy | ±2°C or ±2% of reading |

| Measurement analysis | |
|--|---|
| Atmospheric transmission correction | Automatic, based on inputs for distance, atmospheric temperature and relative humidity |
| Optics transmission correction | Automatic, based on signals from internal sensors |
| Emissivity correction | Variable from 0.01 to 1.0 |
| Reflected apparent temperature correction | Automatic, based on input of reflected temperature |
| External optics/windows correction | Automatic, based on input of optics/window transmission and temperature |
| Measurement corrections | Global object parameters |
| Ethernet | |
| Ethernet | Control and image |
| Ethernet, standard | IEEE 802.3 |
| Ethernet, connector type | RJ-45 |
| Ethernet, type | Gigabit Ethernet |
| Ethernet, communication | TCP/IP socket-based FLIR proprietary and GenICam protocol |
| Ethernet, protocols | TCP, UDP, SNMP, RTSP, RTP, HTTP, ICMP, IGMP, ftp, SMTP, SMB (CIFS), DHCP, MDNS (Bonjour), uPnP |
| Digital input/output | |
| Digital input | 2 opto-isolated, 10–30 VDC |
| Digital output, purpose | Output to ext. device (programmatically set) |
| Digital output | 2 opto-isolated, 10–30 VDC, max 100 mA |
| Digital I/O, isolation voltage | 500 VRMS |
| Digital I/O, supply voltage | 12/24 VDC, max 200 mA |
| Digital I/O, connector type | 6-pole jackable screw terminal |
| Digital input, purpose | Image tag (start, stop, general), Image flow ctrl. (Stream on/off), Input ext. device (programmatically read) |
| Power system | |
| External power operation | 12/24 VDC, 24 W absolute max |
| External power, connector type | 2-pole jackable screw terminal |
| Voltage | Allowed range 10–30 VDC |
| Environmental data | |
| Storage temperature range | -40°C to +70°C (-40 to 158°F) |
| Humidity (operating and storage) | IEC 60068-2-30/24 h 95% relative humidity +25°C to +40°C (77 to 104°F) |
| EMC | <ul style="list-style-type: none"> EN 61000-6-2:2001 (Immunity) EN 61000-6-3:2001 (Emission) FCC 47 CFR Part 15 Class B (Emission) |
| Vibration | 2 g (IEC 60068-2-6) |
| Physical data | |
| Housing material | Aluminium |
| Scope of delivery | |
| Hard transport case or cardboard box, Thermal imaging camera with lens, Utility CD-ROM, Calibration certificate, Ethernet™ cable, USB cable (FLIR A615), Mains cable, Power cable (pig-tailed), Power supply, Printed Getting Started Guide, Printed Important Information Guide, User documentation CD-ROM, Warranty extension card or Registration card, 6-pole screw terminal (mounted on camera) | |

FLIR Systems Trading
Belgium BVBA
Luxemburgstraat 2
B-2321 Meer
Belgium
PH: +32 (0) 3 865 51 00

FLIR Systems AB
Antennvägen 6,
PO Box 7376
SE-187 66 Täby
Sweden
PH: +46 (0)8 753 25 00

FLIR Systems UK
2 Kings Hill Avenue -
Kings Hill
West Malling
Kent
ME19 4AQ
United Kingdom
PH: +44 (0)1732 220 011

www.flir.com
flir@flir.com
NASDAQ: FLIR

FLIR Systems, Inc.
9 Townsend West
Nashua, NH 06063
USA
PH: +1 603.324.7611

FLIR Systems Ltd.
920 Sheldon Ct
Burlington, Ontario
L7L 5K6 Canada
PH: +1 800 613 0507

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2014 FLIR Systems, Inc. All rights reserved. (Created 09/14)