

MV1-D1600-120-CL

The camera series MV1-D1600(C)-CL are based on the e2v EV76C570 CMOS image sensor

Features

- e2v EV76C570 CMOS image sensor
- 1600 x 1200 pixel resolution
- Suitable for standard and low light applications
- Up to 54fps @ full resolution
- Global shutter
- Available in monochrome and color
- Extended sensor and camera features
- Up to 10bit greyscale resolution
- Boardlevel and OEM solution available
- CameraLink® interface



Quantum Efficiency Image Sensor

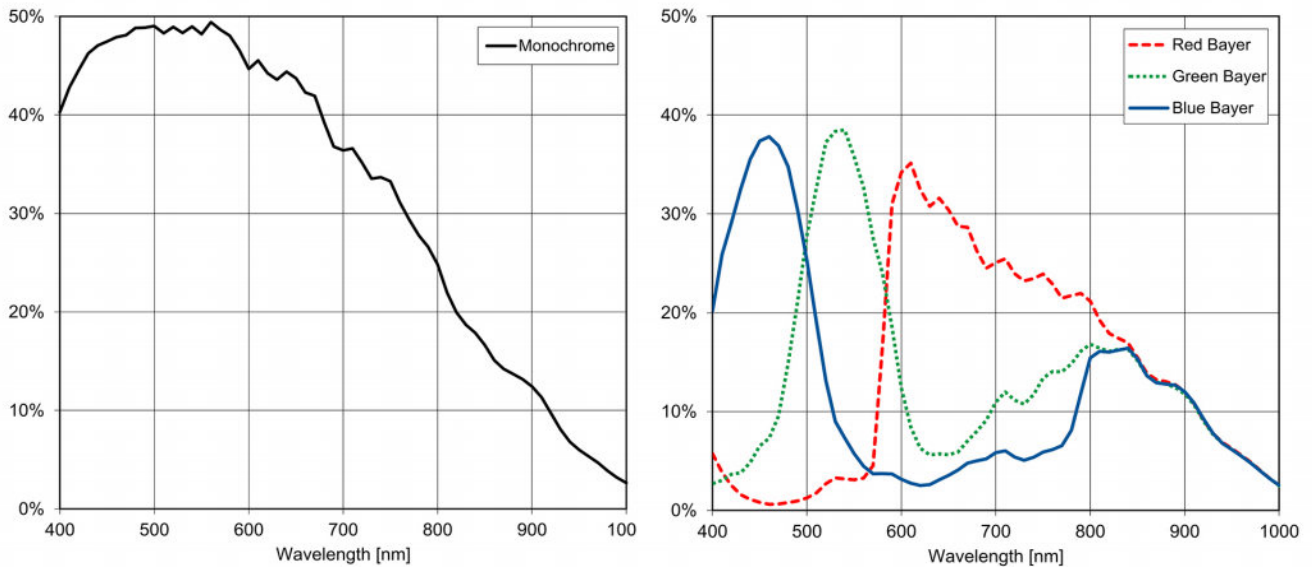


Image Sensor Specifications


| | | |
|--------------------------|--------------------------|---|
| Manufacturer / Type | e2v / EV76C570 | |
| Technology | CMOS | |
| Optical format | 1/1.8" | |
| Optical diagonal | 9mm | |
| Resolution | 1600 x 1200 | |
| Pixel size | 4.5µm x 4.5µm | |
| Active optical area | 7.2mm x 5.4mm | |
| Dark current | 280e ⁻ /s | |
| Read out noise | 15e ⁻ | |
| Full well capacity / SNR | 7ke ⁻ / 84: 1 | |
| Spectral range | Monochrome: | < 350 to 970nm (to 10% of peak responsivity) |
| | Color: | < 390 to 670nm (to 10% of peak responsivity) |
| Responsivity | Monochrome: | 982 x 10 ³ DN / (J/m ²) @ 540nm / 8bit |
| | Color: | 772 x 10 ³ DN / (J/m ²) @ 540nm / 8bit |
| Quantum Efficiency | Monochrome: | > 49% |
| | Color: | > 38% |
| Optical fill factor | 60% | |
| Dynamic range | 52dB | |
| Characteristic curve | Linear | |
| Shutter mode | Global Shutter | |

Camera Specifications





| | |
|----------------------------------|--|
| Interface | CameraLink |
| Frame rate | 54fps |
| Pixel clock | 60MHz |
| Camera taps | 2 |
| Greyscale resolution | 8Bit / 10Bit |
| Fixed pattern noise (FPN) | < 1DN RMS @ 8bit |
| Exposure time range | 13µs - 279ms |
| Analog gain | yes |
| Digital gain | 0.1 to 15.99 (FineGain) |
| Trigger Modes | Free running (non triggered), external Trigger, SWTrigger |
| Features | Configurable region of interest (ROI), Decimation in x- and y-direction, 2 look-up tables (12-to-8Bit) on user-defined image region (Region-LUT), Constant frame rate independent of exposure time, Crosshairs overlay on the image, Temperature monitoring of camera, Camera informations readable over SDK, Ultra low trigger delay and low trigger jitter, Extended trigger input and strobe output functionality, Status line in picture |
| Operation temperature / moisture | 0°C ... + 50°C / 20% ... 80% |
| Storage temperature / moisture | -25°C ... 60°C / 20% ... 95% |
| Power supply | +12VDC (-10%) ... +12VDC (+10%) |
| Power consumption | < 2W |
| Lens mount | C-Mount (CS-Mount optional) |
| I/O Inputs | 1x Opto-isolated |
| I/O Outputs | 1x Opto-isolated |
| Dimensions | 55 x 55 x 32mm ³ |
| Mass | 164g |
| Connector I/O (Power) | Binder 7-pole (mating plug 99-0421-00-07) |
| Connector Interface | CameraLink Base (MDR) |
| Conformity | CE / RoHS / WEEE |
| IP Code | IP20 |

Connectors

| Pin | I/O Type | Name | Description |
|-----|----------|------------|---|
| 1 | PWR | CAMERA_PWR | Camera Power 12VDC |
| 2 | PWR | CAMERA_GND | Camera GND 0V |
| 3 | O | RESERVED | Do not connect |
| 4 | PWR | STROBE-VDD | +5 ... +15 VDC |
| 5 | O | STROBE | Strobe control (opto-isolated) |
| 6 | I | TRIGGER | External trigger (opto-isolated), +5 .. +15VDC |
| 7 | PWR | GROUND | Signal ground (for opto-isolated strobe signal) |

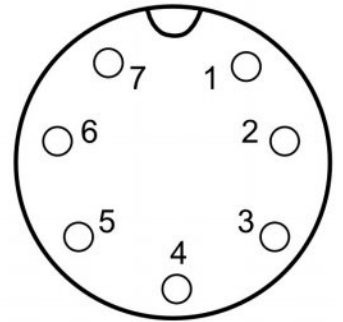

Dimensions

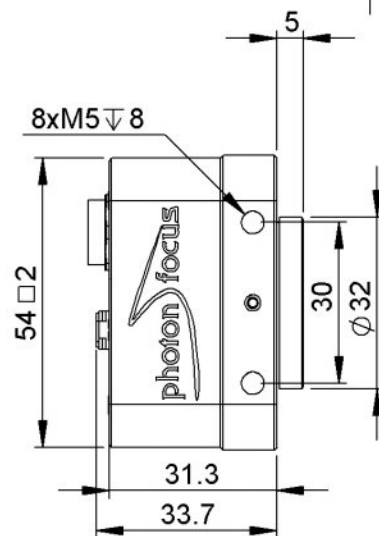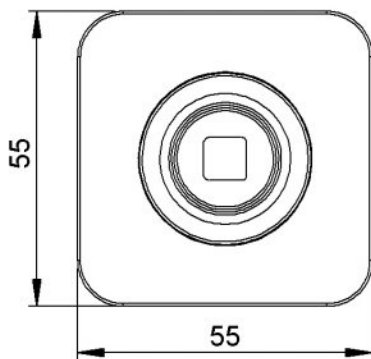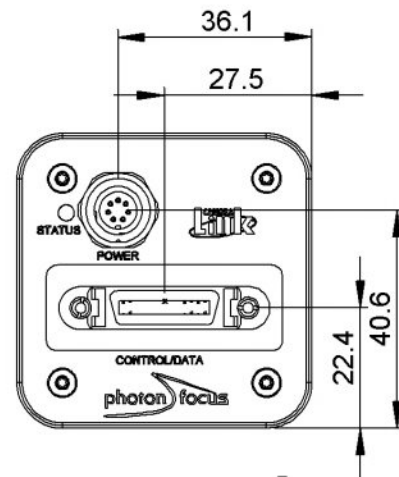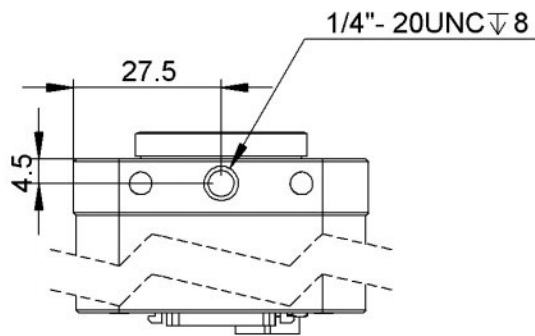

Explanation

| | |
|----------------|-------------------------------|
| DN | DigitalNumber (equals to LSB) |
| e ⁻ | Electrons |

Order Information

| | |
|----------------------|-------------|
| MV1-D1600-120-CL-12 | BW model |
| MV1-D1600C-120-CL-12 | Color model |

Photonfocus AG
Bahnhofplatz 10
CH-8853 Lachen SZ
Switzerland

Phone: +41 55 451 00 00
www.photonfocus.com
info@photonfocus.com

MV1-D1600-120-G2

The camera series MV1-D1600(C)-G2 are based on the e2v EV76C570 CMOS image sensor

Features

- e2v EV76C570 CMOS image sensor
- 1600 x 1200 pixel resolution
- Suitable for standard and low light applications
- Up to 54fps @ full resolution
- Global shutter
- Available in monochrome and color
- Extended sensor and camera features
- Up to 10bit greyscale resolution
- Boardlevel and OEM solution available
- GigEVision interface



GigE[®]
VISION
GEN*i*CAM

Quantum Efficiency Image Sensor

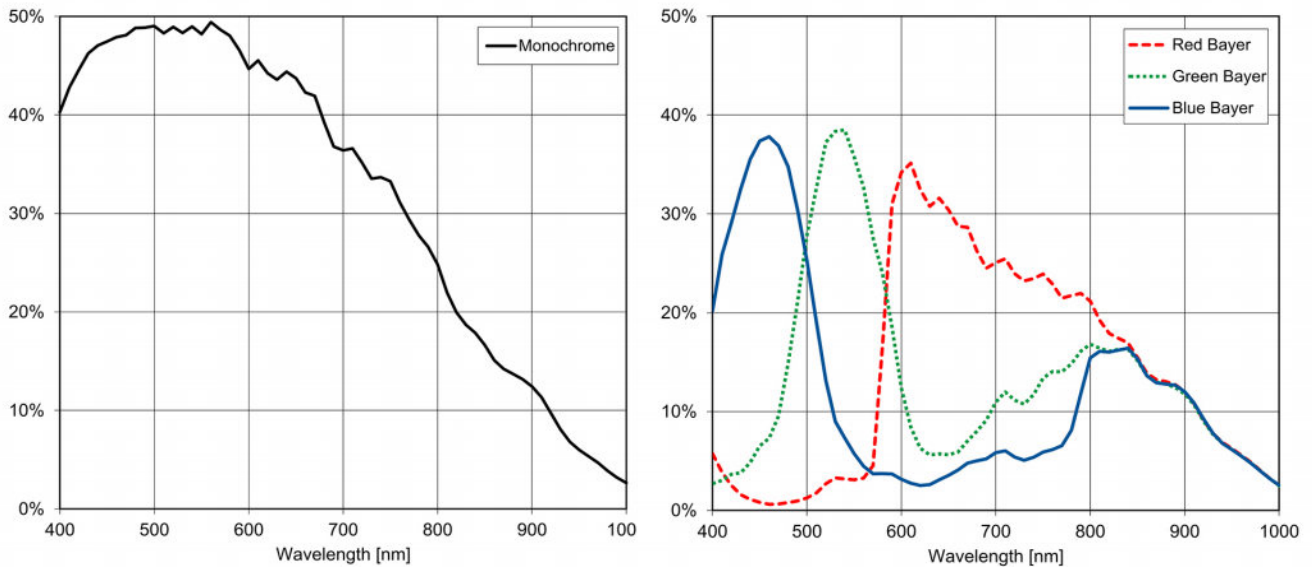


Image Sensor Specifications


| | | |
|--------------------------|--------------------------|---|
| Manufacturer / Type | e2v / EV76C570 | |
| Technology | CMOS | |
| Optical format | 1/1.8" | |
| Optical diagonal | 9mm | |
| Resolution | 1600 x 1200 | |
| Pixel size | 4.5µm x 4.5µm | |
| Active optical area | 7.2mm x 5.4mm | |
| Dark current | 280e ⁻ /s | |
| Read out noise | 15e ⁻ | |
| Full well capacity / SNR | 7ke ⁻ / 84: 1 | |
| Spectral range | Monochrome: | < 350 to 970nm (to 10% of peak responsivity) |
| | Color: | < 390 to 670nm (to 10% of peak responsivity) |
| Responsivity | Monochrome: | 982 x 10 ³ DN / (J/m ²) @ 540nm / 8bit |
| | Color: | 772 x 10 ³ DN / (J/m ²) @ 540nm / 8bit |
| Quantum Efficiency | Monochrome: | > 49% |
| | Color: | > 38% |
| Optical fill factor | 60% | |
| Dynamic range | 52dB | |
| Characteristic curve | Linear | |
| Shutter mode | Global Shutter | |

Camera Specifications





| | |
|----------------------------------|--|
| Interface | GigE |
| Frame rate | 54fps |
| Pixel clock | 60MHz |
| Camera taps | 2 |
| Greyscale resolution | 8Bit / 10Bit |
| Fixed pattern noise (FPN) | < 1DN RMS @ 8bit |
| Exposure time range | 13µs - 279ms |
| Analog gain | yes |
| Digital gain | 0.1 to 15.99 (FineGain) |
| Trigger Modes | Free running (non triggered), external Trigger, SWTrigger |
| Features | Configurable region of interest (ROI), Decimation in x- and y-direction, 2 look-up tables (12-to-8Bit) on user-defined image region (Region-LUT), Constant frame rate independent of exposure time, Crosshairs overlay on the image, Temperature monitoring of camera, Camera informations readable over SDK, Ultra low trigger delay and low trigger jitter, Extended trigger input and strobe output functionality, Status line in picture |
| Operation temperature / moisture | 0°C ... + 50°C / 20 ... 80 % |
| Storage temperature / moisture | -25°C ... 60°C / 20 ... 95 % |
| Power supply | +12VDC (-10%) ... +24VDC (+10%) |
| Power consumption | < 3W |
| Lens mount | C-Mount (CS-Mount optional) |
| I/O Inputs | 2x Opto-isolated 2x RS-422 Opto-isolated |
| I/O Outputs | 2x Opto-isolated |
| Dimensions | 55 x 55 x 40mm ³ |
| Mass | 212g |
| Connector I/O (Power) | Hirose 12-pole (mating plug HR10A-10P-12S) |
| Connector Interface | RJ-45 |
| Conformity | CE / RoHS / WEEE |
| IP Code | IP20 |

Connectors

| Pin | I/O Type | Name | Description |
|-----|----------|---------------------|---|
| 1 | PWR | CAMERA_GND | Camera GND 0V |
| 2 | PWR | CAMERA_PWR | Camera Power 12V... 24V |
| 3 | O | ISO_OUT0 | Default Strobe out, internally Pulled up to ISO_PWR with 4k7 Resistor |
| 4 | I | ISO_INC0_N | INC0 differential input (G2: RS-422, H2: HTL), negative polarity |
| 5 | I | ISO_INC0_P | INC0 differential input (G2: RS-422, H2: HTL), positive polarity |
| 6 | PWR | ISO_PWR | Power supply 5V... 24V for output signals |
| 7 | I | ISO_IN0 | IN0 input signal |
| 8 | O | ISO_OUT1 (MISC) | Q1 output from PLC, no Pull up to ISO_PWR; can be used as additional output (by adding Pull up) or as controllable switch (max. 100mA, no capacitive or inductive load) |
| 9 | I | ISO_IN1(Trigger IN) | Default Trigger IN |
| 10 | I | ISO_INC1_N | INC1 differential input (G2: RS-422, H2: HTL), negative polarity |
| 11 | I | ISO_INC1_P | INC1 differential input (G2: RS-422, H2: HTL), positive polarity |
| 12 | PWR | ISO_GND | I/O GND 0V |

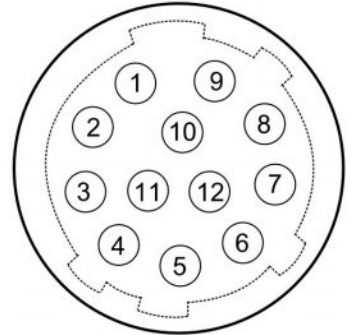

Dimensions

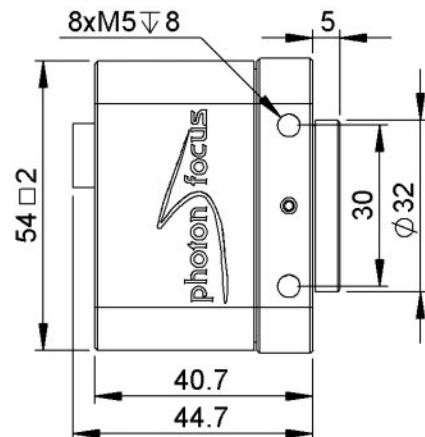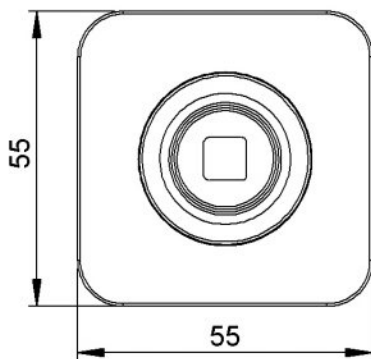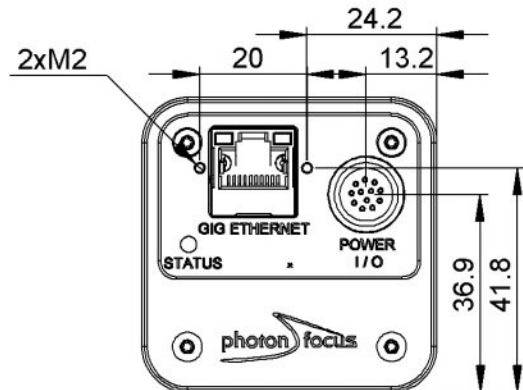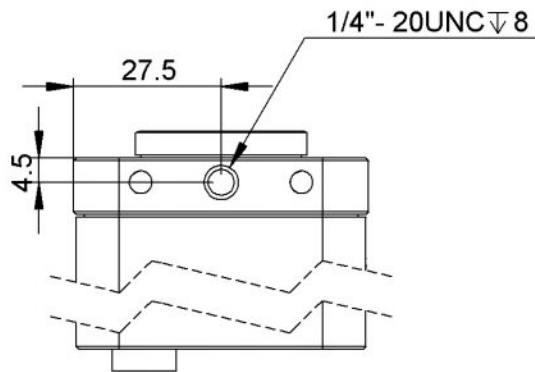

Explanation

| | |
|----------------|-------------------------------|
| DN | DigitalNumber (equals to LSB) |
| e ⁻ | Electrons |

Order Information

| | |
|----------------------|-------------|
| MV1-D1600-120-G2-12 | BW model |
| MV1-D1600C-120-G2-12 | Color model |

Compatibility



Photonfocus AG
Bahnhofplatz 10
CH-8853 Lachen SZ
Switzerland

Phone: +41 55 451 00 00
www.photonfocus.com
info@photonfocus.com