

HBF SERIES - High Luminosity LED Spot Light

HBF series designed to replace halogen light source, spot series offer 4 type colors, Red, Green, Blue and White. And long life time and low power consumption.

Application : in macro lenses inspection, spot light.

	<p>HBF-00-08-1-X-5V</p>
	<p>HBF-00-16-1-X-5V</p>
	<p>HBFS-00-08-1-X-5V</p>

Model	Color	Power Consumption	Current
HBF-00-08-1-X-5V	● ● ● ○	5V / 3 WATT	600mA
HBF-00-16-1-X-5V	● ● ● ○	5V / 3 WATT	600mA
HBFS-00-08-1-X-5V	● ● ● ○	5V / 0.5WATT	100mA

Remarks: HBF Series must use ANG Series / LC Series / STB Series as Lighting Controller.






LED Pattern projector EFFI-Sharp

- **Intense and homogeneous spot light**
- **Standard** connections and fasteners
- **Flexible:**
 - Adjustable **working distance** [50mm,2000mm]
 - Adjustable **illuminated area** [100mm²,1m²]
 - Full range of colors: **from UV to IR, white**
 - Various **projected patterns**
- **Long lifetime** and few maintenance



APPLICATIONS:

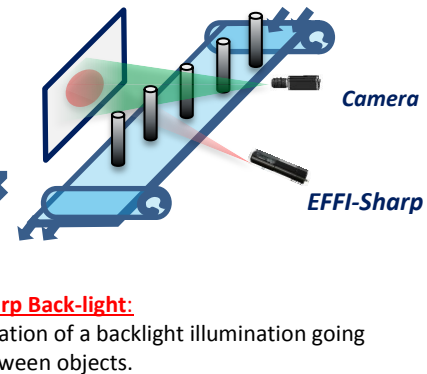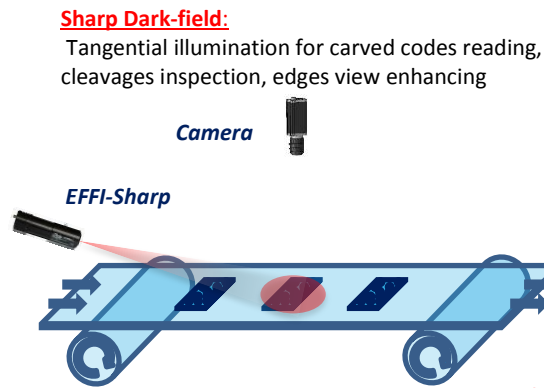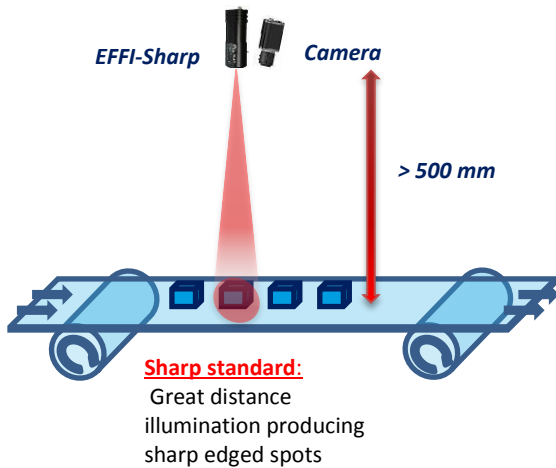


OVERVIEW OF THE CHARACTERISTICS

Electronics	<i>Power supply</i>	24V DC or constant current
	<i>Illumination mode</i>	Continuous or strobe modes
	<i>Connectors</i>	M12 4 pins or M8 3 pins
	<i>Power consumption</i>	5W
Optics	<i>Wavelength</i>	Various wavelengths (from UV to IR, white)
	<i>Projection system</i>	Near Field, Middle Field, Far Field and any C-mount objective
	<i>Projected pattern</i>	Circular, square and custom patterns
Mechanics	<i>Maximum dimensions</i>	32mm x 160mm
	<i>Focusing adjustment</i>	A M3 screw on the objective
	<i>Fastener</i>	4 M4 holes on the side of the device
	<i>Material</i>	Device body : Aluminum alloy
Environment	<i>Working temperature</i>	0°C to 50°C
	<i>IP code</i>	IP54

TECHNICAL CHARACTERISTICS


How to create the EFFI-Sharp?

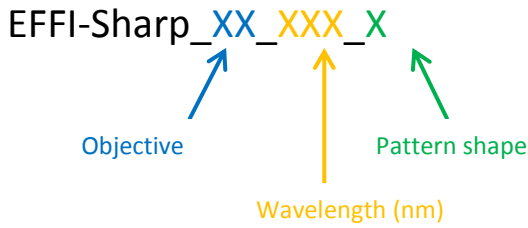

Near Field: **NF** for WD=[100;800]mm
 Middle Field: **MF** for WD=[400;1600]mm
 Far Field: **FF** for WD=[500;1800]mm
 C-mount: **CM** to adjust any C-mount objective

Available wavelengths:

- White: **000**
- Far UV: **365**
- Near UV: **405**
- Blue: **465**
- Green: **525**
- Red: **625**
- Infrared: **850**

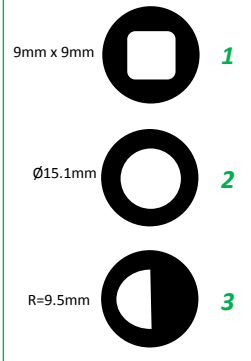

Available options:


- Add a 'P' to integrate a polarizer
- Add a 'S' to strobe the device

Example: EFFI-Sharp_NF_000_2_P_S


Other wavelengths and patterns are available upon request

Optical characteristics

Uniformity of the pattern



Horizontal profile



Vertical profile






Uniformity larger than 80%

Pattern size and illuminance with the working distance



NB : Measurements achieved with a rounded pattern (Ø15mm)

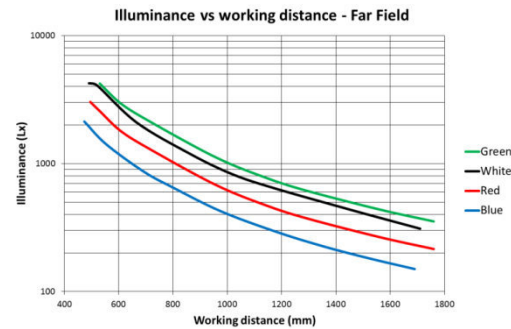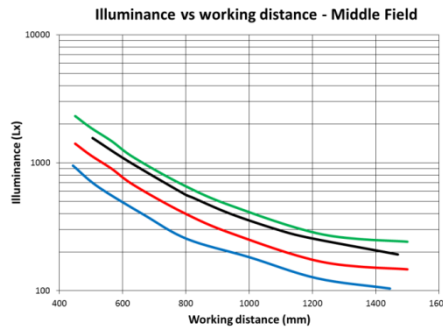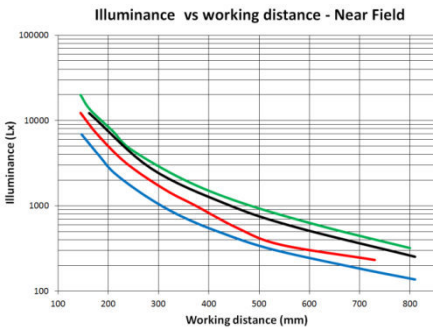


Electrical characteristics


Standard connection

The EFFI-Sharp is supplied using the EFFI-Supply Wire (bolted on the projector) and a 24V constant voltage.

Pin number	Cable color	Designation
1	Brown	+24V
2	White	n.a.
3	Blue	GND
4	Black	DIM – max 15V

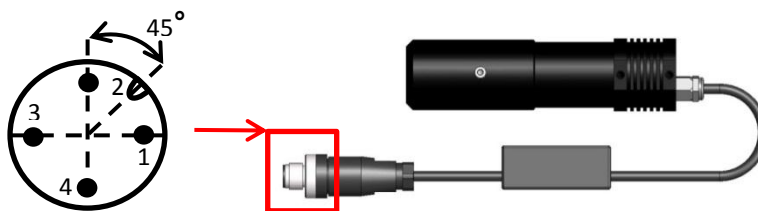

Make sure that you never exceed the maximum voltage.
The device is supplied with a 24V (±5%) constant voltage source.

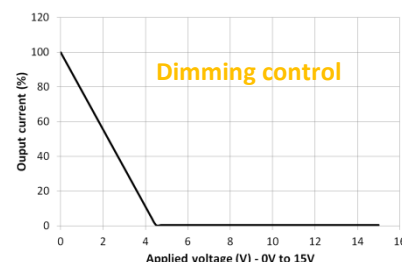


Connection with a current source

A current source, with the correct settings and the correct wires, can be used to supply EFFI-Sharp in a pulsed mode: contact EFFILUX technical support for complete details.



Be aware that the current source option cannot be used with the EFFI-Supply Wire but needs a specific M8 connector.

Pin number	Cable color	Designation
1	Brown	n.a.
3	Blue	+
4	Black	GND

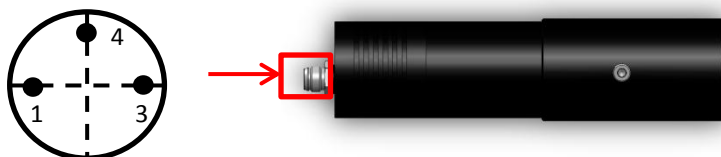

The projector, supplied with a 700mA constant current is considered as the reference. The frequency of the cycle (ON & OFF) has been fixed to 10Hz.

The maximal duty cycle, D, dependent on the injected current, required to safely pulse the LED projector is defined by:

$$D = \frac{\tau_{\text{pulse}}}{T}$$


Be aware that the maximum duty cycle for a given current, given in the following table, cannot be exceeded.

Configuration	Current	Max pulse duration (μs)	D	G_{max}	400nm	460nm	525nm	590nm	625nm	850nm	White
1	1.2A	50000	0.5	Configuration 1	1,5	1,4	1,4	1,5	1,6	1,5	1,4
2	1.5A	10000	0.1	Configuration 2	2	1,8	1,7	2,1	2	1,8	1,7
3	2A	1000	0.01	Configuration 3	2,6	2,2	2,1	2,7	2,6	2,4	2
4	2.5A	100	0.001	Configuration 4	3,2	2,6	2,3	3,4	3,2	2,9	2,4
5	3.5A	40	0.0004	Configuration 5	4	3,1	2,9	4	4,4	3,6	2,8

$$G_{\text{max}} = \frac{\text{luminous flux } (I_{\text{max}})}{\text{luminous flux } (I_{700\text{mA}})}$$

Mechanical considerations

Dimensions

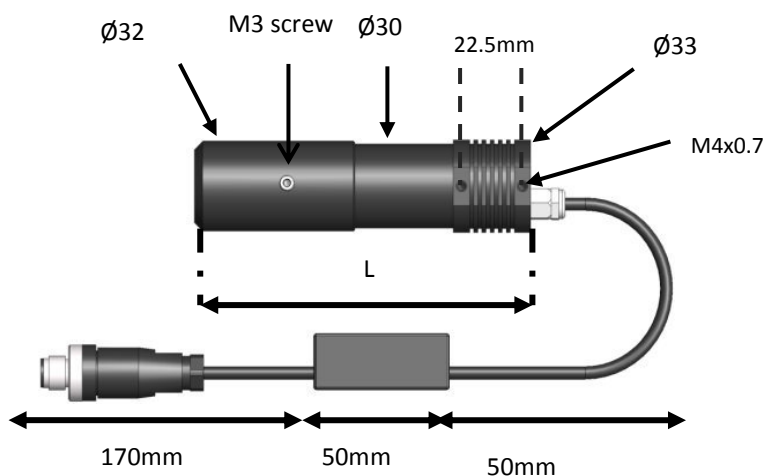


NB: Our accessories can be used to simply your set up.

	Near Field	Middle Field	Far Field
Min L	110mm	116 mm	132mm
Max L	120mm	132 mm	166mm





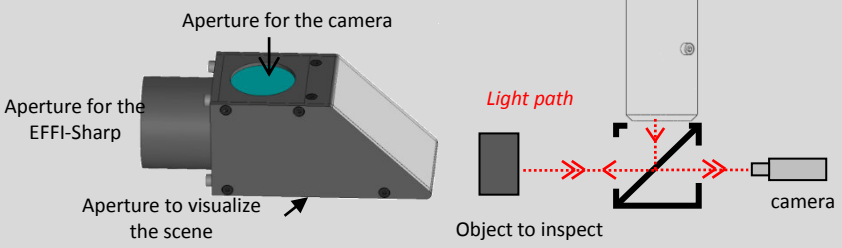
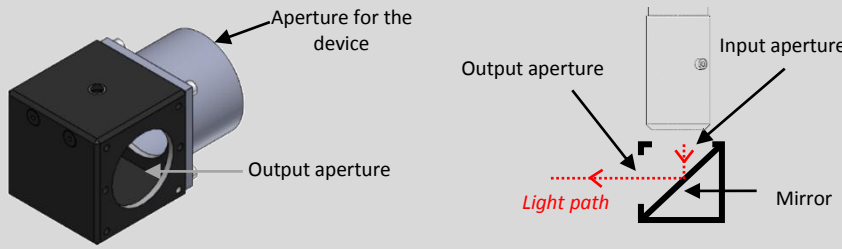
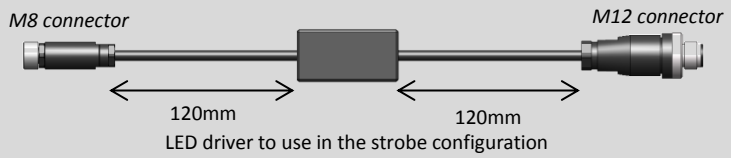
A sharp image is obtained by turning the device's ring in one or another direction until the image is in focus (first, loose carefully the M3 screw present on the objective tube).

Thermal considerations

Thanks to its design, the heat is efficiently dissipated from the LED.

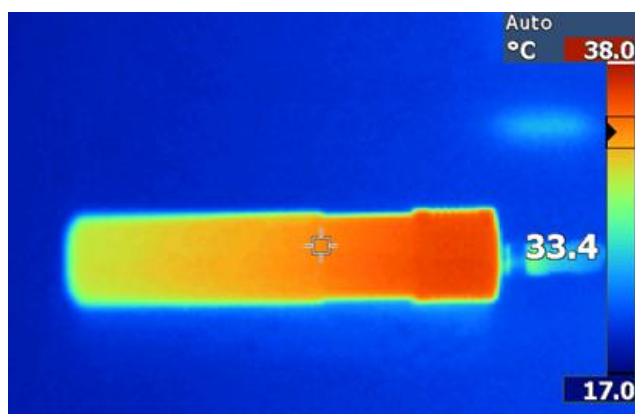

ACCESSORIES

	EFFILUX reference	Description
Mechanics	EFFM_1_0009	 <p>Fastener used to simplify the projector integration (orientation) <i>Delivered with 2 M4x12 screws</i></p> 
	EFFM_1_0001	 <p>Fastener used to simplify the projector integration <i>Delivered with 2 M4x20 screws</i></p> 
Optics	EFFO-Polariser_0004	Polarizer integrated in the projector to polarize the output light
	EFFO_0007	<p>Coaxial accessory without ghost effect</p>  <p>Aperture for the camera Aperture for the EFFI-Sharp Aperture to visualize the scene Object to inspect camera Light path</p>
	EFFO_0006	<p>Provides a 90° angle between the light source and the illuminated area</p>  <p>Aperture for the device Output aperture Input aperture Mirror Light path</p>
Electronics	EFFC-Cable_M12_0002 Binder: 79 3430 13 04	M12 cable, 4 pins, 2000mm long
	EFFC-Cable_M12_0003 Binder: 79 3430 17 04	M12 cable, 4 pins, 5000mm long
	EFFC-Cable_M12_0004 Binder: 79 3430 30 04	M12 cable, 4 pins, 10000mm long
	EFFC-Cable_M12_0025 Phoenix : 1456938	M12 cable, 4 pins, High-Flex, 1500mm long
	EFFC-Cable_M12_0026 Phoenix : 1456941	M12 cable, 4 pins, High-Flex, 3000mm long
	EFFE-Comp_0006	 <p>M8 connector M12 connector 120mm 120mm LED driver to use in the strobe configuration</p>






LED Pattern projector EFFI-Sharp Power

- **Intense and homogeneous** spot light
- **Standard** connections and fasteners
- **Flexible:**
 - Adjustable **working distance** [50mm,2000mm]
 - Adjustable **illuminated area** [100mm² ,1m²]
 - Full range of colors: **from UV to IR, white**
 - Various **projected patterns**
- **Long lifetime** and few maintenance



APPLICATIONS:

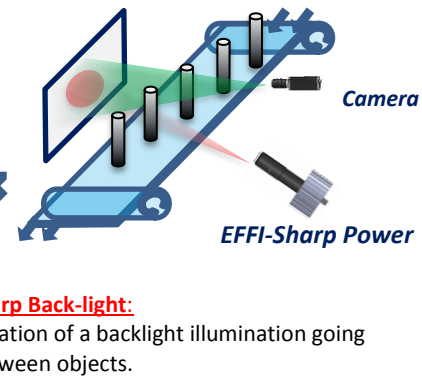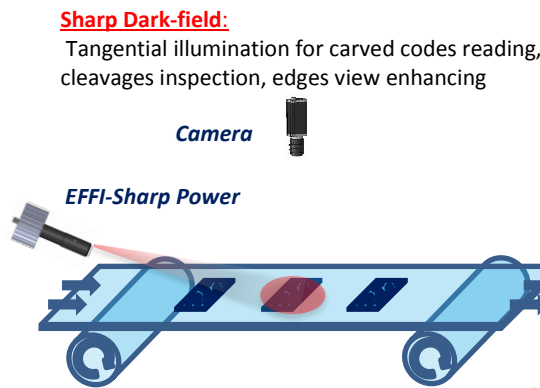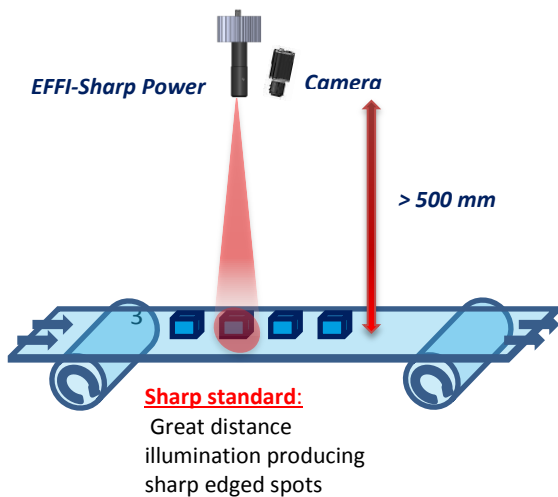

OVERVIEW OF THE CHARACTERISTICS

Electronics	<i>Power supply</i>	24V DC or constant current
	<i>Illumination mode</i>	Continuous or strobe modes
	<i>Connectors</i>	M12 4 pins or M8 3pins
	<i>Power consumption</i>	15W
Optics	<i>Wavelength</i>	Various wavelengths (from UV to IR, white)
	<i>Projection system</i>	Near Field, Middle Field, Far Field and any C-mount objective
	<i>Projected pattern</i>	Circular, square and custom patterns
Mechanics	<i>Maximum dimensions</i>	85mm x 200mm
	<i>Focusing adjustment</i>	A M3 screw on the objective
	<i>Fastener</i>	2 M4 holes and 1 M6 hole on the backside of the device
	<i>Material</i>	Device body : Aluminum alloy
Environment	<i>Working temperature</i>	0°C to 50°C
	<i>IP code</i>	IP54

TECHNICAL CHARACTERISTICS


How to create the EFFI-Sharp Power?

EFFI-Sharp_Power_XX_XXX_X
 Objective → XX
 Wavelength (nm) → XXX
 Pattern shape → X

Near Field: **NF** for WD=[100;800]mm
 Middle Field: **MF** for WD=[400;1600]mm
 Far Field: **FF** for WD=[500;1800]mm
 C-mount: **CM** to adjust any C-mount objective

Available wavelengths:

- White: **000**
- Far UV: **365**
- Near UV: **405**
- Blue: **465**
- Green: **525**
- Red: **625**
- Infrared: **850**

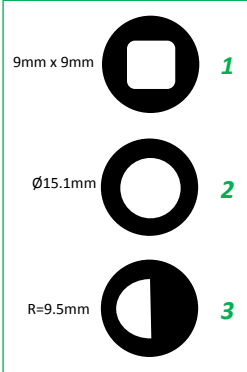

Available options:


1. Add a 'P' to integrate a polarizer
2. Add a 'S' to strobe the device

Example: EFFI-Sharp_NF_000_2_P_S


Other wavelengths and patterns are available upon request

Optical characteristics

Uniformity of the pattern



Horizontal profile

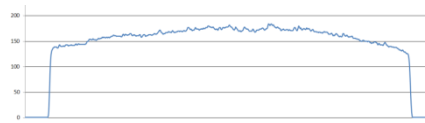


Vertical profile




Uniformity larger than 80%

Pattern size and illuminance with the working distance


Illuminance vs working distance - Near Field

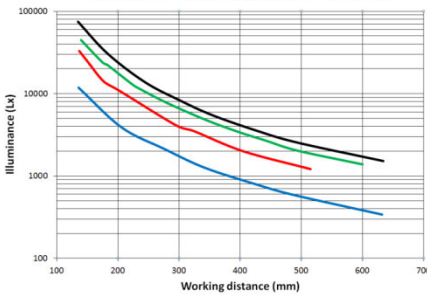


Illuminance vs working distance - Middle Field

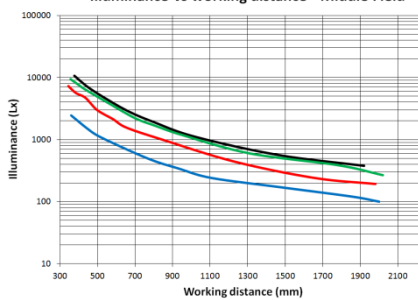

Illuminance vs working distance - Far Field

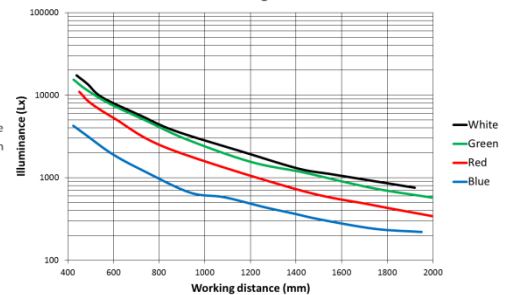

Pattern size vs working distance

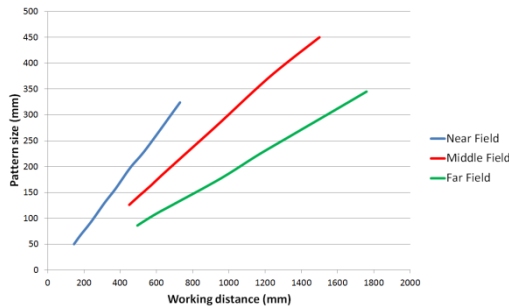


NB : Measurements achieved with a rounded pattern (Ø=15mm)

Electrical characteristics



Standard connection

The EFFI-Sharp Power is supplied using the EFFI-Supply Wire (bolted on the projector) and a 24V constant voltage.

Pin number	Cable color	Designation
1	Brown	+24V
2	White	n.a.
3	Blue	GND
4	Black	DIM – max 15V



M12 connector

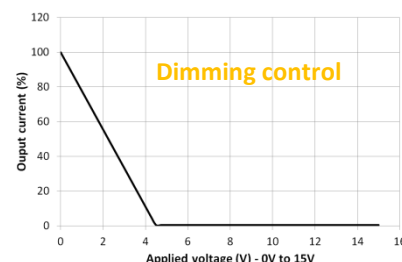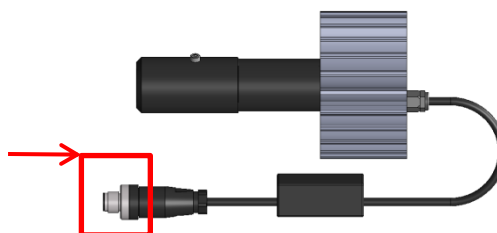

Make sure that you never exceed the maximum voltage.
The device is supplied with a 24V (±5%) constant voltage source.


Connection with a current source

A current source, with the correct settings and the correct wires, can be used to supply EFFI-Sharp Power in a pulsed mode: contact EFFILUX technical support for complete details.




Be aware that the current source option cannot be used with the EFFI-Supply Wire but needs a specific M8 connector.

Pin number	Cable color	Designation
1	Brown	n.a.
3	Blue	+
4	Black	GND




M8 connector

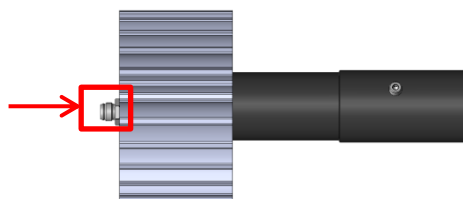

The projector, supplied with a 700mA constant current is considered as the reference. The frequency of the cycle (ON & OFF) has been fixed to 10Hz.

The maximal duty cycle, D, dependent on the injected current, required to safely pulse the LED projector is defined by:

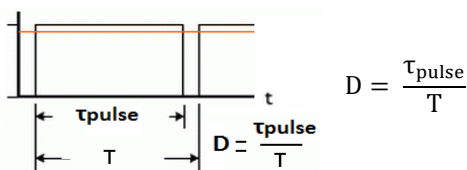



Be aware that the maximum duty cycle for a given current, given in the following table, cannot be exceeded.

Configuration	Current	Max pulse duration (μs)	D	G_{max}	400nm	460nm	525nm	590nm	625nm	850nm	White
1	1.2A	50000	0.5								
2	1.5A	10000	0.1	Configuration 1	1,5	1,4	1,4	1,5	1,6	1,5	1,4
3	2A	1000	0.01	Configuration 2	2	1,8	1,7	2,1	2	1,8	1,7
4	2.5A	100	0.001	Configuration 3	2,6	2,2	2,1	2,7	2,6	2,4	2
5	3.5A	40	0.0004	Configuration 4	3,2	2,6	2,3	3,4	3,2	2,9	2,4
				Configuration 5	4	3,1	2,9	4	4,4	3,6	2,8

$$G_{\text{max}} = \frac{\text{luminous flux } (I_{\text{max}})}{\text{luminous flux } (I_{700\text{mA}})}$$

Mechanical considerations

Dimensions

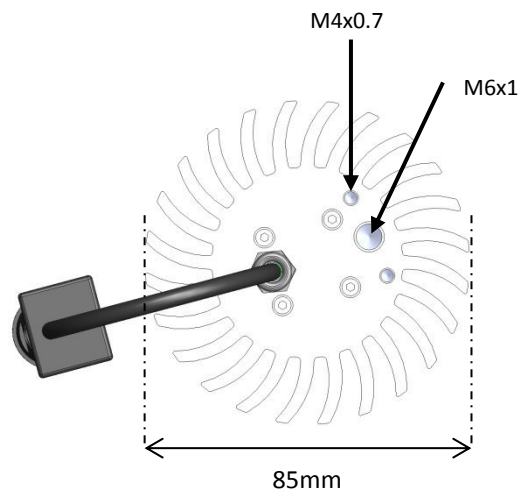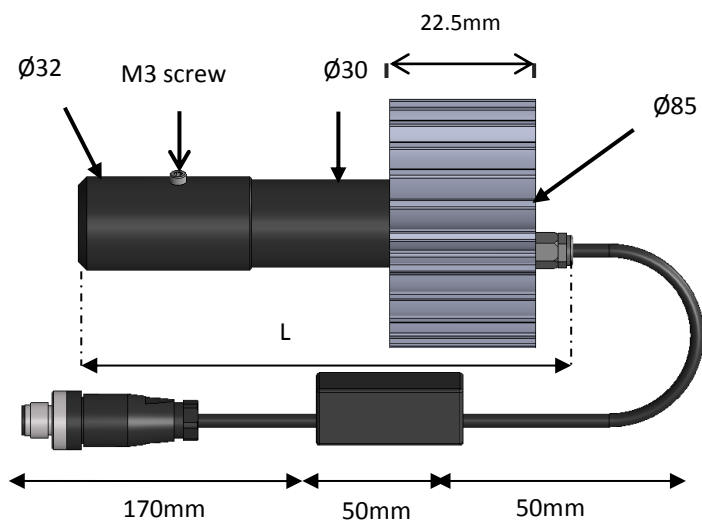


	Near Field	Middle Field	Far Field
Min L	144mm	149mm	166mm
Max L	154mm	165mm	200mm

NB: Our accessories can be used to simply your set up.





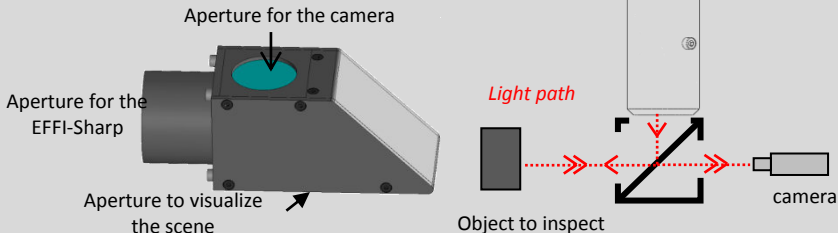
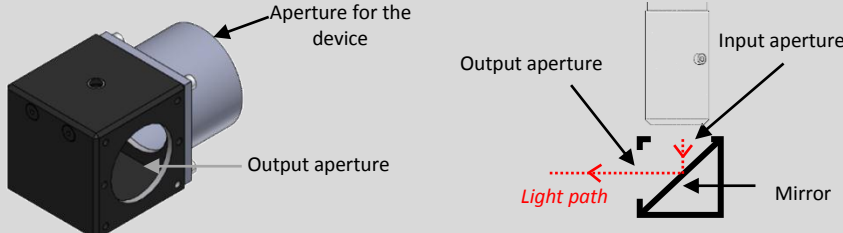
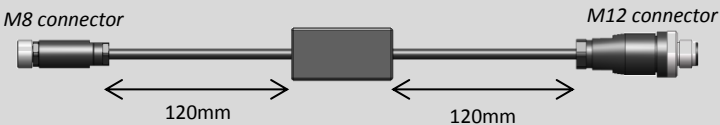
A sharp image is obtained by turning the device's ring in one or another direction until the image is in focus (first, loose carefully the M3 screw present on the objective tube).

Thermal considerations

Thanks to its design, the heat is efficiently dissipated from the LED.

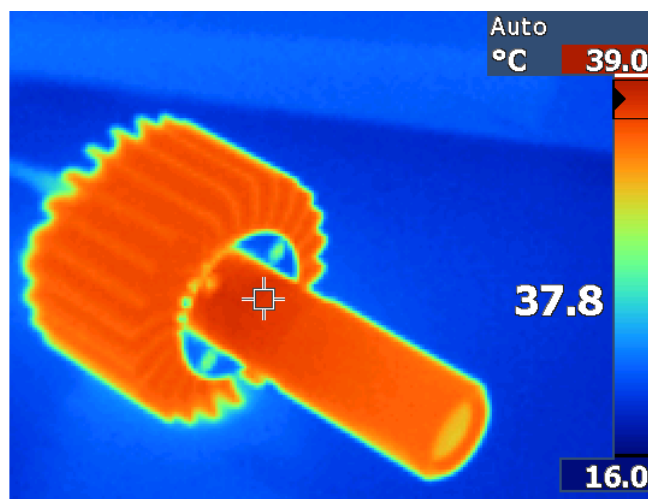

ACCESSORIES


	EFFILUX reference	Description
Mechanics	EFFM_1_0009	 <p>Fastener used to simplify the projector integration (orientation) <i>Delivered with 2 M4x12 screws</i></p> 
	EFFM_1_0001	 <p>Fastener used to simplify the projector integration <i>Delivered with 2 M4x20 and 1 M6x16 screws</i></p> 
Optics	EFFO-Polariser_0004	Polarizer integrated in the projector to polarize the output light
	EFFO_0007	<p>Coaxial accessory without ghost effect</p>  <p>Aperture for the camera Aperture for the EFFI-Sharp Aperture to visualize the scene Light path Object to inspect camera</p>
	EFFO_0006	<p>Provides a 90° angle between the light source and the illuminated area</p>  <p>Aperture for the device Output aperture Light path Input aperture Mirror</p>
Electronics	EFFC-Cable_M12_0002 Binder: 79 3430 13 04	M12 cable, 4 pins, 2000mm long
	EFFC-Cable_M12_0003 Binder: 79 3430 17 04	M12 cable, 4 pins, 5000mm long
	EFFC-Cable_M12_0004 Binder: 79 3430 30 04	M12 cable, 4 pins, 10000mm long
	EFFC-Cable_M12_0025 Phoenix : 1456938	M12 cable, 4 pins, High-Flex, 1500mm long
	EFFC-Cable_M12_0026 Phoenix : 1456941	M12 cable, 4 pins, High-Flex, 3000mm long
	EFFE-Comp_0006	 <p>M8 connector M12 connector 120mm 120mm LED driver to use in the strobe configuration</p>

LED Pattern projector EFFI-Sharp FL

- **Intense and homogeneous spot light**
- **Standard** connections and fasteners
- **Flexible:**
 - Adjustable **working distance** [50mm,350mm]
 - Adjustable **illuminated area** [50mm²,2500m²]
 - Full range of colors: **from UV to IR, white**
 - Various **projected patterns**
- **Long lifetime** and few maintenance




APPLICATIONS:

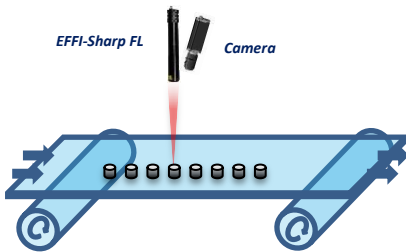

Sharp Focused-light (FL):

- Very intense illumination for short working distance.
- Inspection of high speed objects, fluorescence

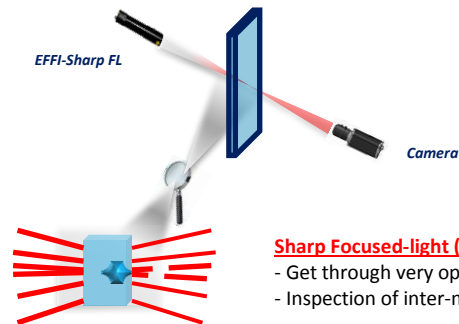

Sharp Focused-light (FL) through material:


- Get through very opaque material.
- Inspection of inter-material defects

OVERVIEW OF THE CHARACTERISTICS

Electronics	<i>Power supply</i>	24V DC or constant current
	<i>Illumination mode</i>	Continuous or strobe modes
	<i>Connectors</i>	M12 4 pins or M8 3 pins
	<i>Power consumption</i>	5W
Optics	<i>Wavelength</i>	Various wavelengths (from UV to IR, white)
	<i>Projection system</i>	Near Field, Middle Field, Far Field
	<i>Projected pattern</i>	Circular, square and custom patterns
Mechanics	<i>Maximum dimensions</i>	32mm x 220mm
	<i>Focusing adjustment</i>	A M3 screw on the objective
	<i>Fastener</i>	4 M4 holes on the side of the device
	<i>Material</i>	Device body : Aluminum alloy
Environment	<i>Working temperature</i>	0°C to 50°C
	<i>IP code</i>	IP54

TECHNICAL CHARACTERISTICS


How to create the EFFI-Sharp?

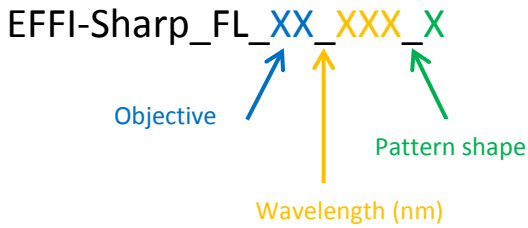

Near Field: **NF** for WD=[40;70]mm
 Middle Field: **MF** for WD=[70;150]mm
 Far Field: **FF** for WD=150;350]mm

Available wavelengths:

- White: **000**
- Far UV: **365**
- Near UV: **405**
- Blue: **465**
- Green: **525**
- Red: **625**
- Infrared: **850**

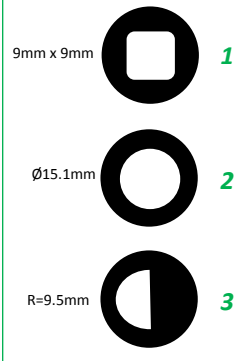

Available options:


- Add a 'P' to integrate a polarizer
- Add a 'S' to strobe the device

Example: EFFI-Sharp_FL_NF_000_2_P_S

Other wavelengths and patterns are available upon request

Optical characteristics

Uniformity of the pattern



Horizontal profile




Vertical profile



Uniformity larger than 80%


Pattern size and illuminance with the working distance

Pattern size vs working distance

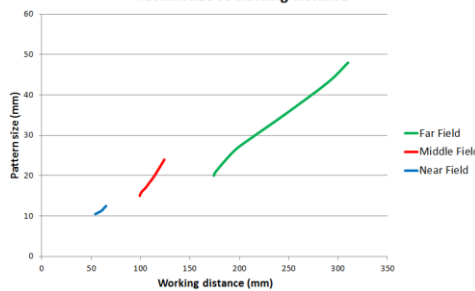


NB : Measurements achieved with a rounded pattern (Ø15mm)


Illuminance vs working distance - Near Field

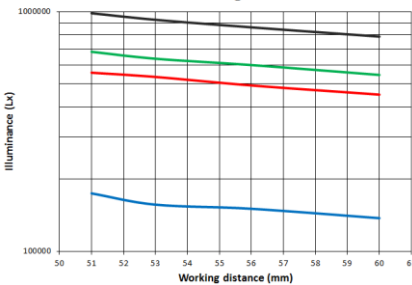

Illuminance vs working distance - Middle Field

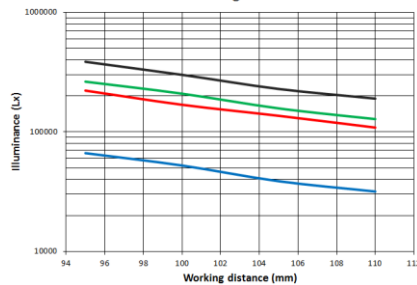

Illuminance vs working distance - Far Field

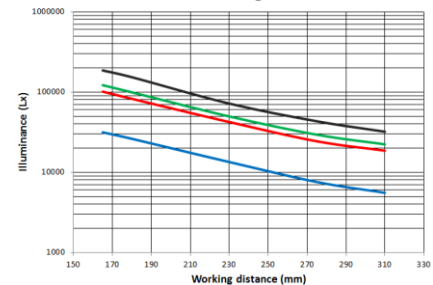


Electrical characteristics


Standard connection

The EFFI-Sharp is supplied using the EFFI-Supply Wire (bolted on the projector) and a 24V constant voltage.

Pin number	Cable color	Designation
1	Brown	+24V
2	White	n.a.
3	Blue	GND
4	Black	DIM – max 15V

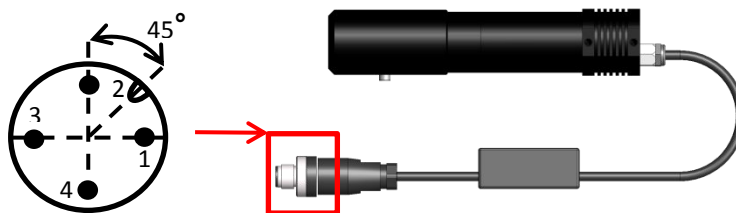

Make sure that you never exceed the maximum voltage.
The device is supplied with a 24V (±5%) constant voltage source.

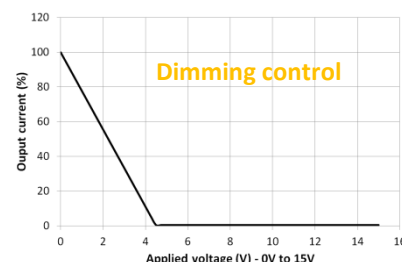


Connection with a current source

A current source, with the correct settings and the correct wires, can be used to supply EFFI-Sharp in a pulsed mode: contact EFFILUX technical support for complete details.




Be aware that the current source option cannot be used with the EFFI-Supply Wire but needs a specific M8 connector.

Pin number	Cable color	Designation
1	Brown	n.a.
3	Blue	+
4	Black	GND

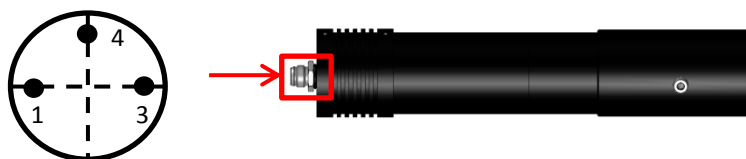

The projector, supplied with a 700mA constant current is considered as the reference. The frequency of the cycle (ON & OFF) has been fixed to 10Hz.

The maximal duty cycle, D, dependent on the injected current, required to safely pulse the LED projector is defined by:

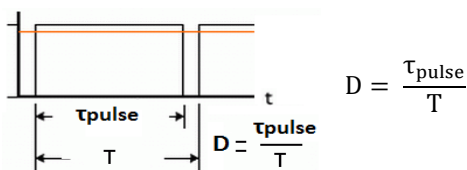


Be aware that the maximum duty cycle for a given current, given in the following table, cannot be exceeded.

Configuration	Current	Max pulse duration (μs)	D	G_{max}	400nm	460nm	525nm	590nm	625nm	850nm	White
1	1.2A	50000	0.5								
2	1.5A	10000	0.1	Configuration 1	1,5	1,4	1,4	1,5	1,6	1,5	1,4
3	2A	1000	0.01	Configuration 2	2	1,8	1,7	2,1	2	1,8	1,7
4	2.5A	100	0.001	Configuration 3	2,6	2,2	2,1	2,7	2,6	2,4	2
5	3.5A	40	0.0004	Configuration 4	3,2	2,6	2,3	3,4	3,2	2,9	2,4
				Configuration 5	4	3,1	2,9	4	4,4	3,6	2,8

$$G_{max} = \frac{\text{luminous flux } (I_{max})}{\text{luminous flux } (I_{700mA})}$$

Mechanical considerations

Dimensions

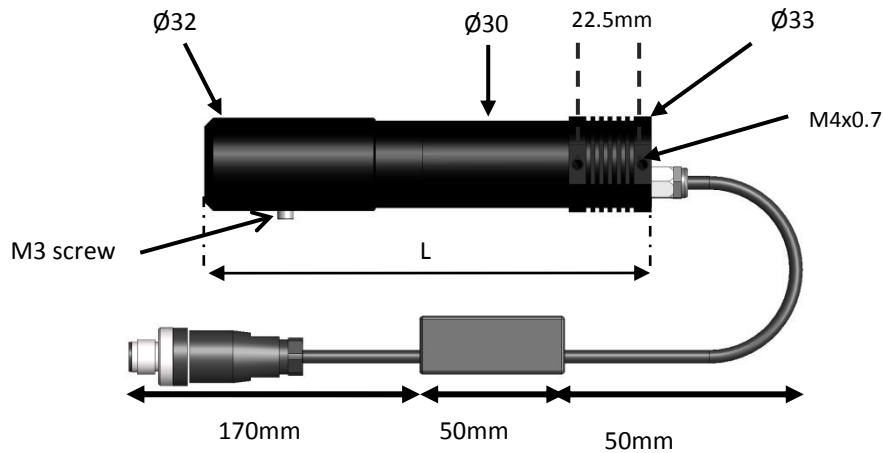


NB: Our accessories can be used to simply your set up.

	Near Field	Middle Field	Far Field
Min L	163mm	168 mm	185mm
Max L	173mm	173 mm	219mm





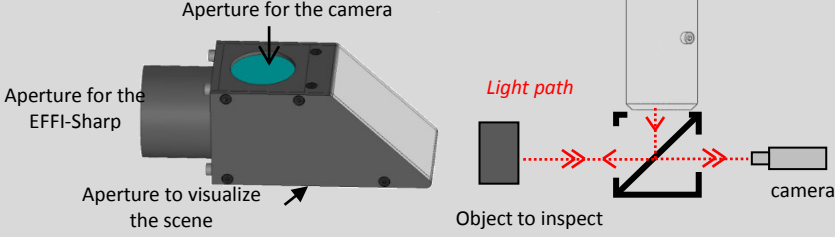
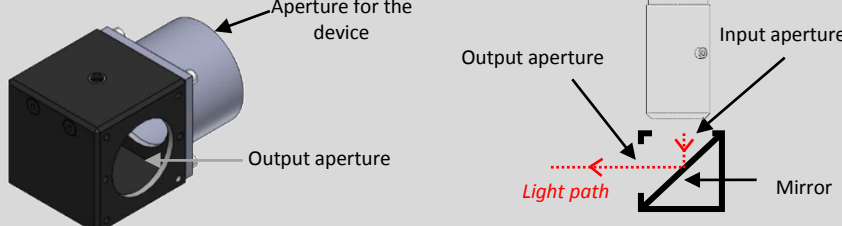
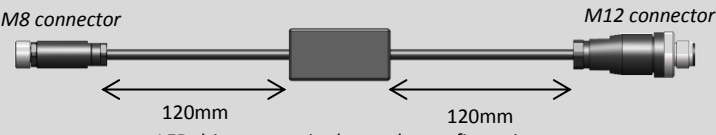
A sharp image is obtained by turning the device's ring in one or another direction until the image is in focus (first, loose carefully the M3 screw present on the objective tube).

Thermal considerations

Thanks to its design, the heat is efficiently dissipated from the LED.

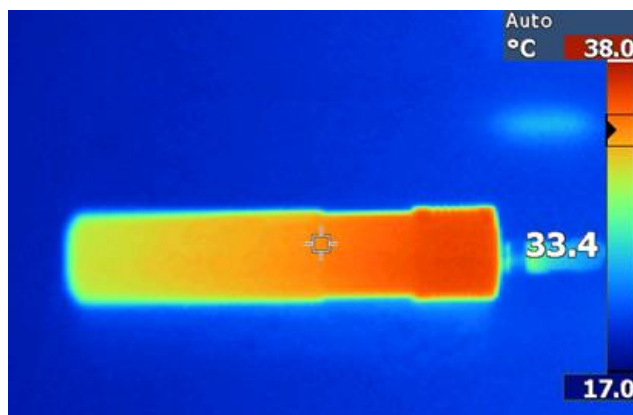

ACCESSORIES

	EFFILUX reference	Description
Mechanics	EFFM_1_0009	 <p>Fastener used to simplify the projector integration (orientation) <i>Delivered with 2 M4x12 screws</i></p> 
	EFFM_1_0001	 <p>Fastener used to simplify the projector integration <i>Delivered with 2 M4x20 screws</i></p> 
Optics	EFFO-Polariser_0004	Polarizer integrated in the projector to polarize the output light
	EFFO_0007	<p>Coaxial accessory without ghost effect</p> 
	EFFO_0006	<p>Provides a 90° angle between the light source and the illuminated area</p> 
Electronics	EFFC-Cable_M12_0002 Binder: 79 3430 13 04	M12 cable, 4 pins, 2000mm long
	EFFC-Cable_M12_0003 Binder: 79 3430 17 04	M12 cable, 4 pins, 5000mm long
	EFFC-Cable_M12_0004 Binder: 79 3430 30 04	M12 cable, 4 pins, 10000mm long
	EFFC-Cable_M12_0025 Phoenix : 1456938	M12 cable, 4 pins, High-Flex, 1500mm long
	EFFC-Cable_M12_0026 Phoenix : 1456941	M12 cable, 4 pins, High-Flex, 3000mm long
	EFFE-Comp_0006	 <p>LED driver to use in the strobe configuration</p>